



BEA Architectural Specification Sheet

Automatic and Industrial Door Solutions: Push Plate – 10PBRx (Hardwired)

Sensor Specifications

Round Push Plate for sliding, swinging, folding and revolving doors. Wired push plate shall utilize a single pole dry contact switch capable of providing a normally open or normally closed contact for door activation.

1. Push plate provided with no exposed fasteners on the faceplate area.
2. Faceplate utilizes an abrasive etch lettering and/or logo. Push plates made of plastic, or having surface applied painted or decal lettering shall not be acceptable.
3. Stainless steel 6 inches (15.24 cm) round style push plate (PBR) for wall mount applications.
4. Screws come in multiple sizes (#6 & #8) to fit both single and double gang mounting boxes.
5. Beveled edges provide a tamper and vandal resistant solution.
6. All-activate plate activates with any "push" location.
7. Weather boot provided between plate and plate back.

Note to Specifier: Select one of the following model paragraphs and delete those not required.

8. Model 10PBR marked PUSH TO OPEN, 5.87 inches (14.92 cm) by 1.25 inch (3.19 cm).
9. Model 10PBRLL Handicapped logo, 5.87 inches (14.92 cm) by 1.25 inch (3.19 cm).
10. Model 10PBR1 Handicapped logo and marked PUSH TO OPEN, 5.87 inches (14.92 cm) by 1.25 inch (3.19 cm)
11. Model 10PBR10 no marking, 5.87 inches (14.92 cm) by 1.25 inch (3.19 cm).

Note to Specifier: Select one of the following mounting paragraphs and delete those not required.

12. Model 10BOX6RNDMSM – ABS surface mount box
13. Model 10BOX6RNDFM – ABS flush mount
14. Model 10ESCUTCHEON – Stainless steel surface mount escutcheon

BEA Inc.
RIDC Park West
100 Enterprise Drive
Pittsburgh, PA 15275-1213

Phone: 1.800.523.2462
Fax: 1.888.523.2462




AAADM Member
American Association of
Automatic Door Manufacturers

A HALMA COMPANY



Product image and Application Photo

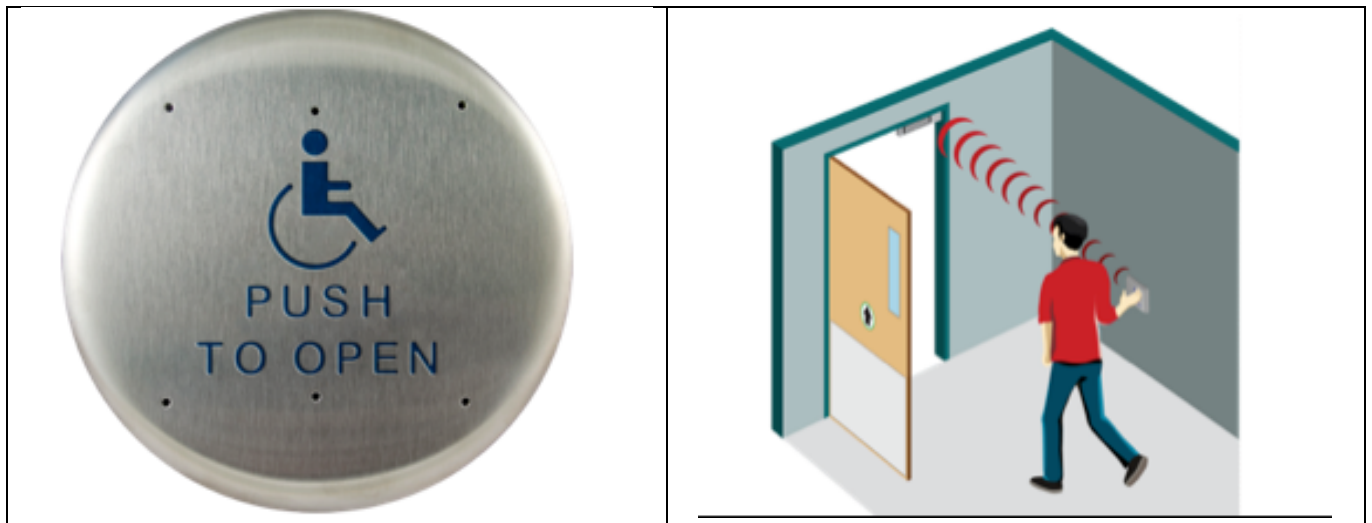

Technical Specs:

Faceplate Material	16 gauge, 304 2B Stainless Steel
Backplate Material	1/8 inch (.31 cm) thick, Aluminum
Mounting Screws	Stainless Steel, 6-32 × 1 in & 8-32 × 1 in Allen Head Size: 5/64
Cherry Switch	Single-pole, 15 A, COM/NO/NC

BEA Inc.
RIDC Park West
100 Enterprise Drive
Pittsburgh, PA 15275-1213

Phone: 1.800.523.2462
Fax: 1.888.523.2462




AAADM Member
American Association of
Automatic Door Manufacturers

A HALMA COMPANY



Dimensions:

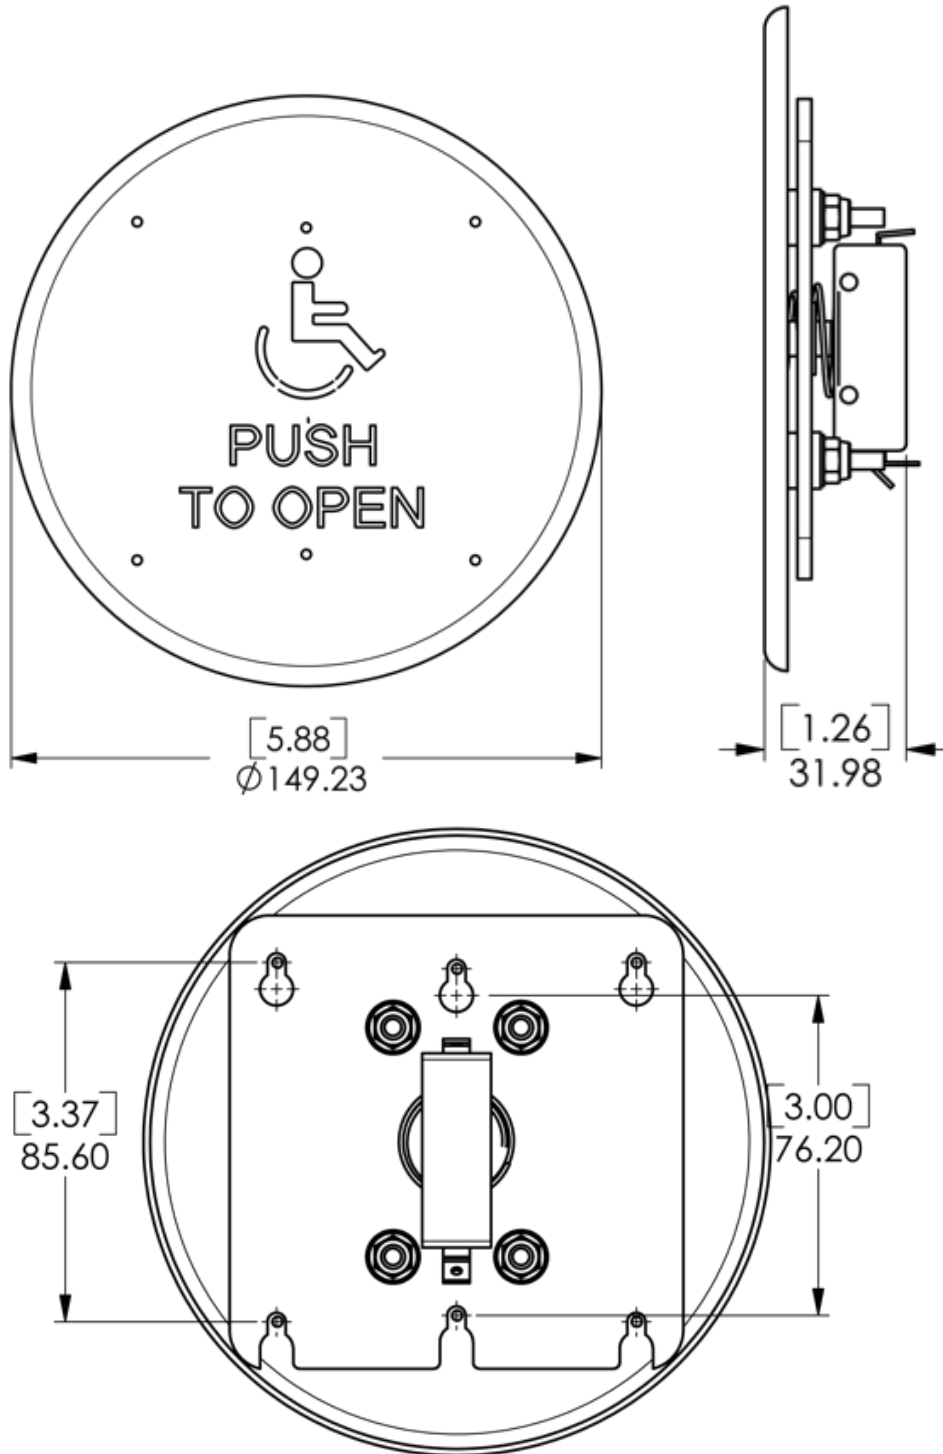

BEA Inc.
RIDC Park West
100 Enterprise Drive
Pittsburgh, PA 15275-1213

Phone: 1.800.523.2462
Fax: 1.888.523.2462



AAADM Member
American Association of
Automatic Door Manufacturers

A HALMA COMPANY