




BE SURE TO PLACE TWO METAL WASHERS UNDER TAMPER SCREW HEAD.

3/32" [2.4mm] DIA. FOR #6 TAMPER SCREW

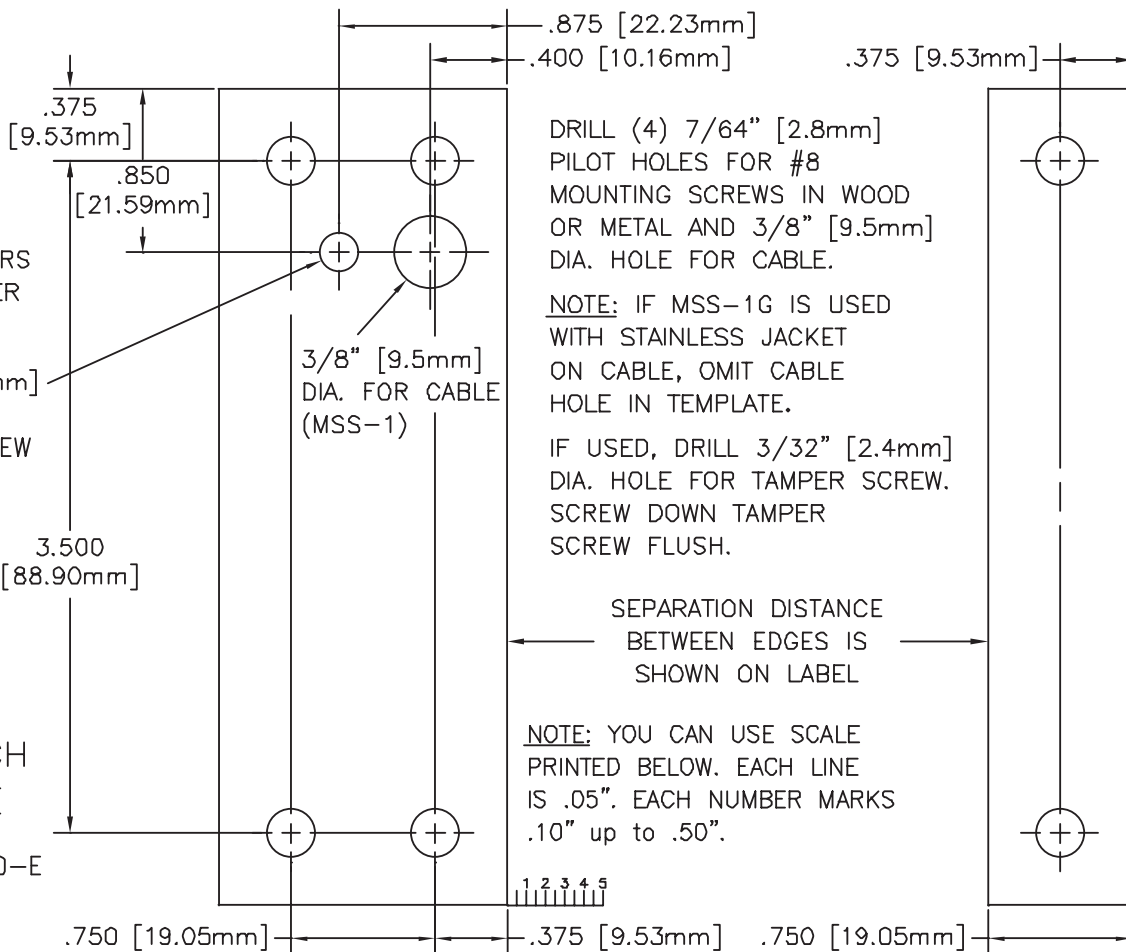

DRILL (4) 7/64" [2.8mm] PILOT HOLES FOR #8 MOUNTING SCREWS IN WOOD OR METAL AND 3/8" [9.5mm] DIA. HOLE FOR CABLE.

NOTE: IF MSS-1G IS USED WITH STAINLESS JACKET ON CABLE, OMIT CABLE HOLE IN TEMPLATE.

IF USED, DRILL 3/32" [2.4mm] DIA. HOLE FOR TAMPER SCREW. SCREW DOWN TAMPER SCREW FLUSH.

SEPARATION DISTANCE BETWEEN EDGES IS SHOWN ON LABEL

NOTE: YOU CAN USE SCALE PRINTED BELOW. EACH LINE IS .05". EACH NUMBER MARKS .10" up to .50".

MSS SWITCH TEMPLATE

P/N 500-12900-E

DO NOT PHOTOCOPY TEMPLATE (dimensions will change)

SECURITRON
ASSA ABLOY